


ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China
Email:wp@cnjingganrefractory.com/sdwenping@163.com
Contact:Rose Tel/Wechat:+86-13275332819
Tel:86-533-4188518 Fax:86-533-4188518

Magnesium Dry Ramming Material for Electric Furnace

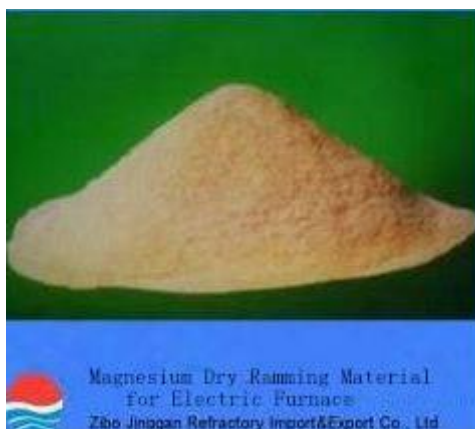

1,Description of Magnesium Dry Ramming Material for Electric Furnace

Magnesium Dry Ramming Material for Electric Furnace adopts fused high-quality magnesite, magnesia-iron spinel as main raw material, using tamping mechanical dry forming,beware of water addition ceramic bonding structure is formed in the process of use,compact,which makes the product very resistant to erosion and erosion, and has a good effect in use.

The product uses high iron and high calcium to synthesize magnesia and fused magnesia as aggregates, synthetic magnesia and fused magnesia as fine powder, with critical particle size of 5-6 mm and multi-stage ingredients.Through strong tamping construction, the density after construction is ensured and sintered into a solid whole at appropriate temperature. Generally speaking, the first life of dry ramming material can reach more than 300 stoves,by repairing the mat, the furnace can be extended to 500-600 stoves, which not only reduces the number of stops, but also reduces the consumption of refractories per ton of steel.

2,Index of Magnesium Dry Ramming Material for Electric Furnace

Item		JDH-83	JDH-88
Model			
Chemical composition%	MgO	≥83.0	≥88
	CaO	7-10	5-9
	Fe2O3	6-8	6-8

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

	Al ₂ O ₃	≤1.0	≤1.0
	SiO ₂	≤1.8	≤1.8
Crushing strength MPa	1300℃*3h	≥30	≥32
	1500℃*3h	≥80	≥85
Volumetric-weight g/cm ³		≥2.20	≥2.25

3,The remarkable features of the product are: because the main mineral phases of the product are high melting point phases of magnesia and zirconia, the product has high temperature resistance, good slag corrosion resistance, rapid sintering and forming a solid whole in the process of use, so it has strong erosion resistance, good high temperature toughness and is not easy to float in the process of use.

4,Characteristics of Magnesium Dry Ramming Material for Electric Furnace

- 1)Magnesium Dry Ramming Material for Electric Furnace is strictly waterproof erosion during storage,and is packed in waterproof kraft paper bags.
- 2)Products need to be premixed before use, so that all kinds of materials stir evenly.

5.Good feedback of product use effect,the products have been exported to Pakistan, Russia, Australia

6.We are a professional supplier, who can provide customers with free product technology, use and other issues.

Do you want to find a professional supplier of refractory products?

Do you want to find a professional supplier of graphite electrodes?

Do you want to find a stable and credible supplier?

Then let's contact with jinggan company

Contact me:Email:wp@cnjingganrefractory.com/sdwenping@163.com

TEL: 86-0533-4188518 / FAX: 86-0533-4188518

Rose:+86-13275332819(wechat/whatsapp number)